



BENTOSEAL® TROWEL-GRADE SODIUM BENTONITE MASTIC

APPLICATION ILLUSTRATIONS

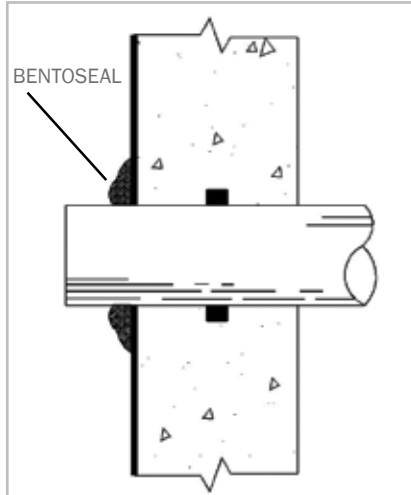

Penetrations

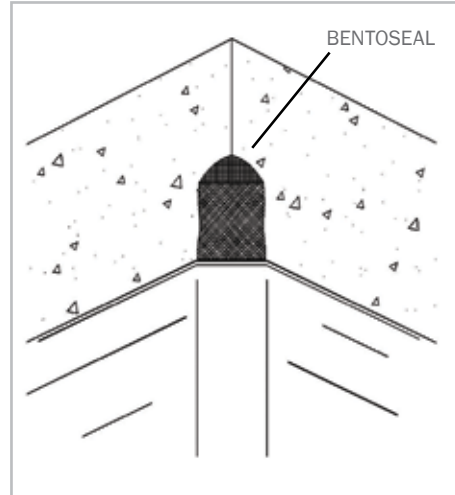

Inside corners

APPROXIMATE COVERAGE RATE GUIDE

USAGE	TYPICAL COVERAGE
19 mm inside corner fillet	1.6 l/m / kg
As a 2.3 mm thick flashing material	0.3 sq.m / kg
19 mm inside corner fillet with 150 mm, 2.3 mm thick extensions	0.6 l/m / kg
2.3 mm by 100 mm wide termination lap fillet	3.0 l/m / kg